




User Manual



Hydro Charger

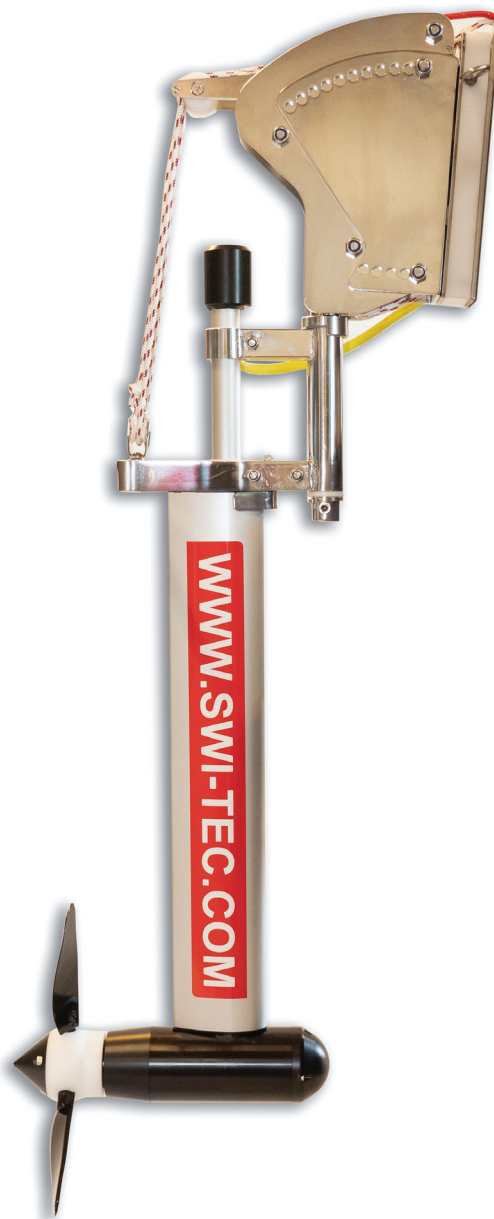

SWI-TEC, Neveta Náutica S.L.
Poligono 9, Apt. 51, E-07680 Port Cristo (Mallorca)
Tel. +34 971 82 24 26, Fax: +34 971 82 20 17
E-Mail: info@swi-tec.com, www.swi-tec.com


Mounting

1. Fixing of transom bracket with counter-plate and delivered screws. (Smaller openings downwards) Attention the Hydro Charger should dive 30 to 70 cm into the water. The position of the bracket always offset of rudders and propeller.
2. Insert the bracket into the transom bracket and lock with safety pin.
3. Adjust with the two segments the generator in vertical position in reference to the water.

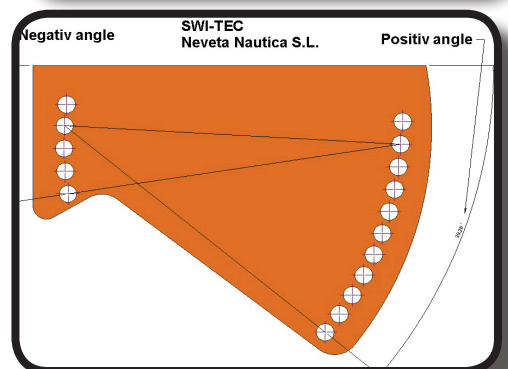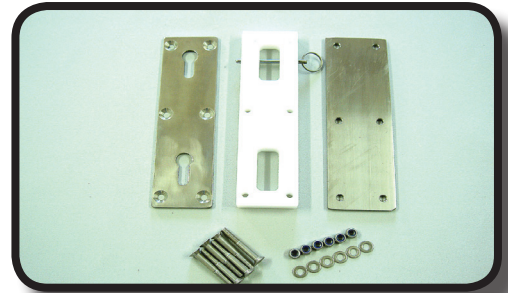


Start up


1. Hydro Charger swiveled to upward position
2. Drop of Hydro Charger: by hand forcing backwards and smooth guiding with the lifting line (1)

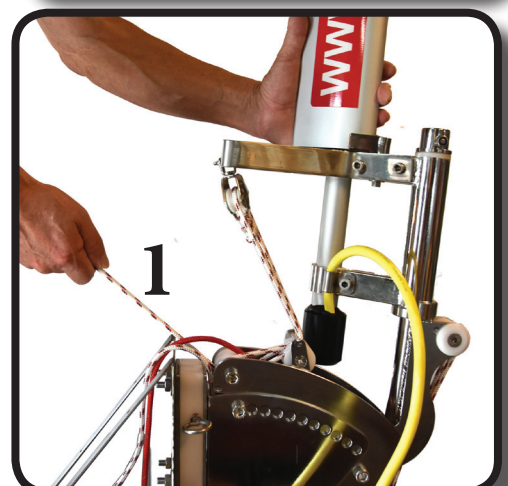


3. Put the Hydro Charger with lifting line (1) slowly downwards (no falling)

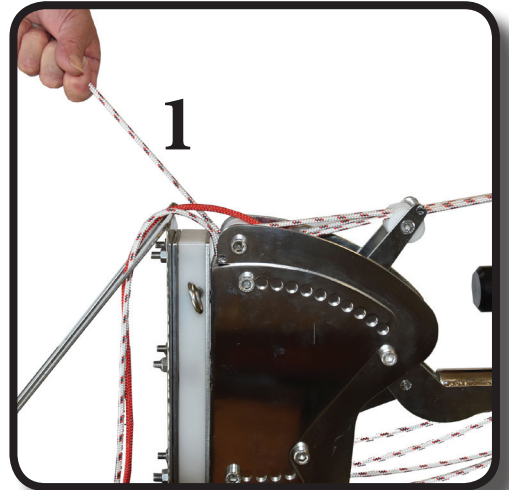

4. Controlled dropping of the Hydro Charger with the lifting line (1). Mean while pulling the dropping line (2) of loose.

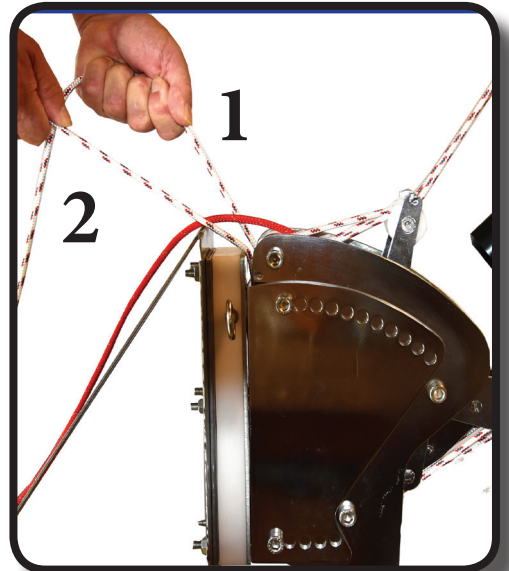

5. Pulling of the Hydro Charger until to the lock and to vertical position with the dropping line (2)

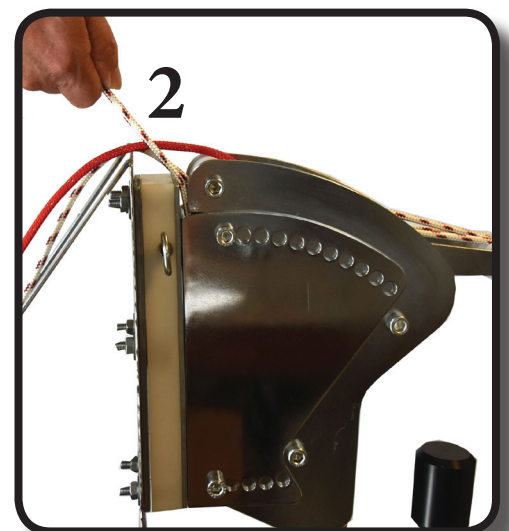


6. Short and strong pulling of the dropping line (2) for blocking of the Hydro Charger in working position. All 3 lines are now released without any tension.




Hoisting


7. Release of blockage for hoisting: pull on the red line (3) and at the same time on the lifting line (1) to release the blockage.

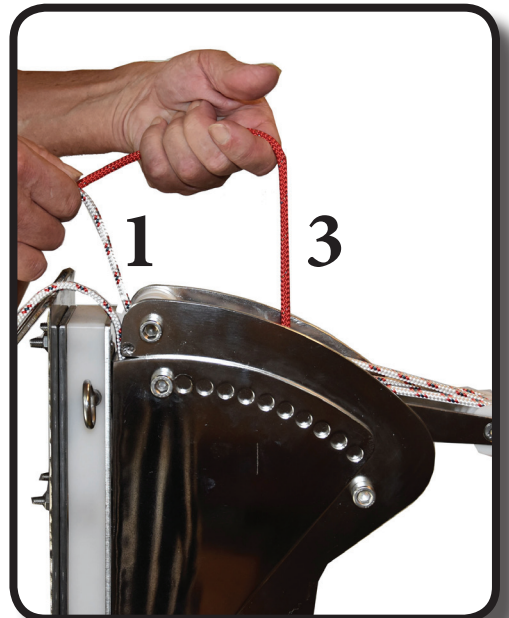


8. Hoisting: continues pulling of the lifting line (1) without the red line (3).

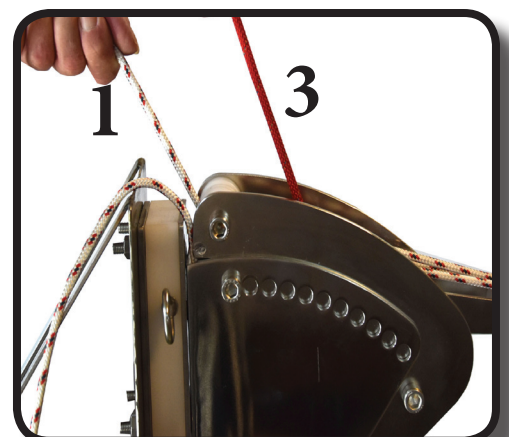

9. Further smooth pulling of the lifting line (1).

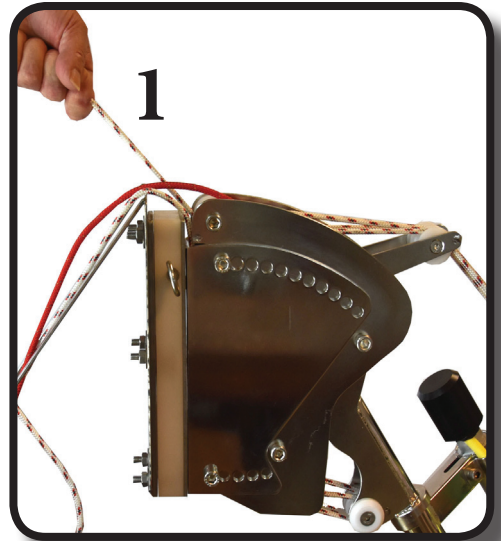

10. Dropping line (2) always released for easier lifting

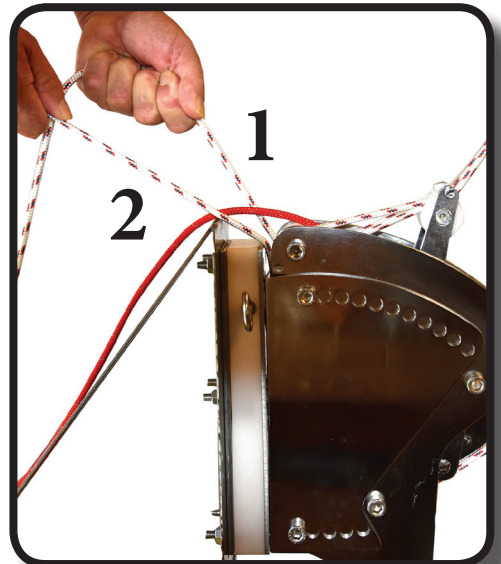

11. Once arrived at top, positioning by hand in best position and fixing with lash back, or taking off and store the Hydro Charger in the boat.

